



BLINDS + GLASS

A MODERN ALTERNATIVE TO TRADITIONAL BLINDS







ODL BLINDS + GLASS

is a blinds-between-glass IG panel
for doors and windows

Building upon our 75+ year history of developing IG panels for doors, ODL continues to innovate in the blinds-between-glass category, where we have been the industry leader for over 20 years. Our industry relationships led us to discover that manufacturers, builders and homeowners wanted a simple solution that addressed and solved concerns about the safety, cleaning, and lack of ease associated with traditional blinds. That's why ODL created a modern alternative to traditional blinds.

Our most recent product innovation, **ODL Blinds + Glass**, allows for custom sizes and colors in as few as eight days, with the quality, reliability, and warranty you've come to expect from ODL. Homeowners and window manufacturers can rely on ODL Blinds + Glass for designs and options to fit every home.

Safety is a top priority for most consumers, and ODL Blinds + Glass proudly boasts certifications from two industry-leading child safety organizations. Best for Kids™ and Parents for Window Blind Safety™ advocate for cordless window coverings and educate consumers on products which greatly reduce or completely eliminate the risk of injury to children and pets.

Our goal is to provide quality products that improve your everyday life. In addition to a 10-year full replacement warranty, ODL offers the color options and configurations needed to compliment any architectural style. With ODL Blinds + Glass the possibilities are endless!





SINGLE AND DOUBLE
HUNG WINDOWS



7/8" BLINDS + GLASS RLT TOP FOR WINDOWS

PRODUCT FEATURES:

- Raise, lower, and tilt blinds
- Symmetric privacy channels
- EasyGlide Operator located top center
- 1/8" Tempered or Annealed glass
- Low-E options:
 - Single: 270, 272, 340, 366
 - Dual: 189/270, 189/272, 189/340, 189/366
- Glass tint options:
 - Solar Gray and Solar Bronze
- 10-year full warranty

AVAILABLE COLORS:



OPERATOR:



PROGRAM DETAILS:


- Dimensions:
 - 15" – 54" wide
 - 12" – 41" tall
 - IG Thickness: 7/8" or 1" (with 6mm external glass option)
- Tempered or Annealed Glass - up to 9 ft² (single operator)
- Custom size increments 1/16" (height & width)
- Minimum Quantity: 1
- Annealed Shipping Lead Times:
 - US: 8 business days + transit
- Tempered Shipping Lead Times:
 - US: 12 business days + transit

US Patent No. 10,876,353 B2

BLINDS SIZE RANGE[‡]

7/8" RLT-Top ANNEALED / TEMPERED


Single Operator
Max 9 Sq. Ft. (No more than 36" in one direction)
Operator Location Top Center

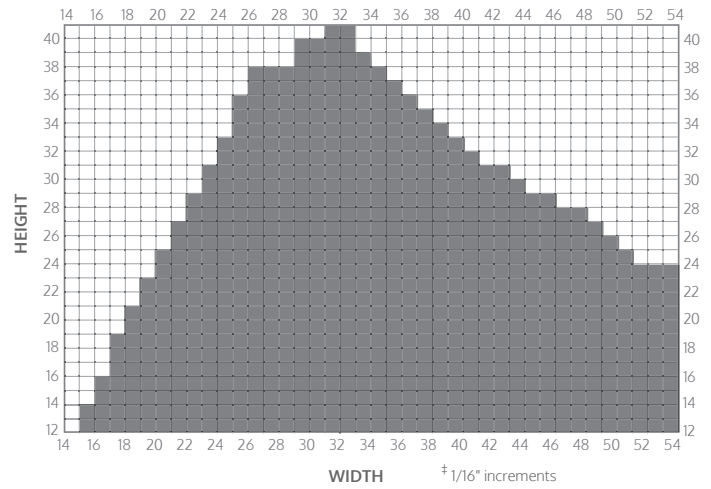

7/8" RLT-Top LADDER CORDS PER GLASS SIZE

Single Operator
Max 9 Sq. Ft. (no more than 36" in one direction)
Operator Location Top Center

2 Ladder Cords 4 Ladder Cords
3 Ladder Cords 5 Ladder Cords

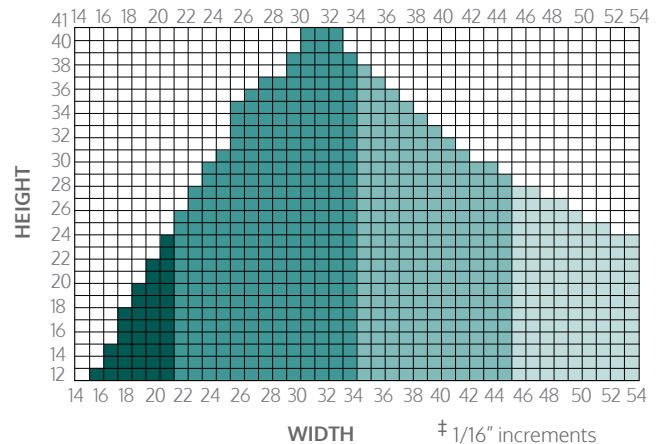



SINGLE AND DOUBLE
HUNG WINDOWS



7/8" BLINDS + GLASS TILT TOP FOR WINDOWS

PRODUCT FEATURES:

- Blinds with tilt operation
- Symmetric privacy channels
- Tilt operator located in the top right corner
- 1/8" Tempered or Annealed glass
- Low-E options:
Single: 270, 272, 340, 366
Dual: 189/270, 189/272, 189/340, 189/366
- Glass tint options:
Solar Gray and Solar Bronze
- 10-year full warranty

AVAILABLE COLORS:




OPERATOR:



PROGRAM DETAILS:

- Dimensions:
8" – 54" wide
12" – 68" tall
IG Thickness: 7/8" or 1" (with 6mm external glass option)
- Tempered or Annealed glass - up to 9 ft²
- Custom size increments 1/16" (height & width)
- Minimum Quantity: 1
- Annealed Shipping Lead Times:
US: 8 business days + transit
- Tempered Shipping Lead Times:
US: 12 business days + transit


BLINDS SIZE RANGE[‡]

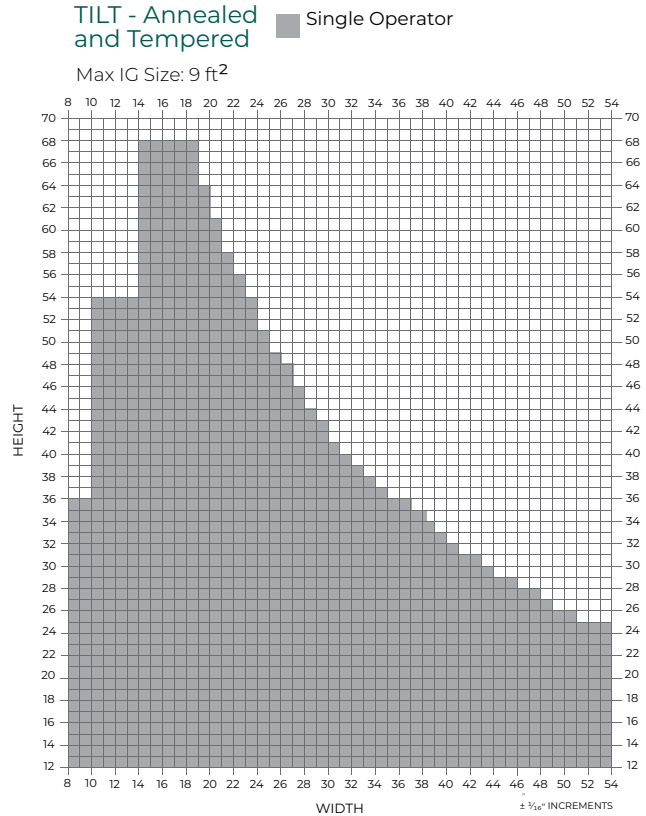

TILT - Ladder Cords Per Glass Size Single Operator

Max IG Size: 9 ft²
(no more than 36" in one direction)

2 Ladder Cords 3 Ladder Cords 4 Ladder Cords

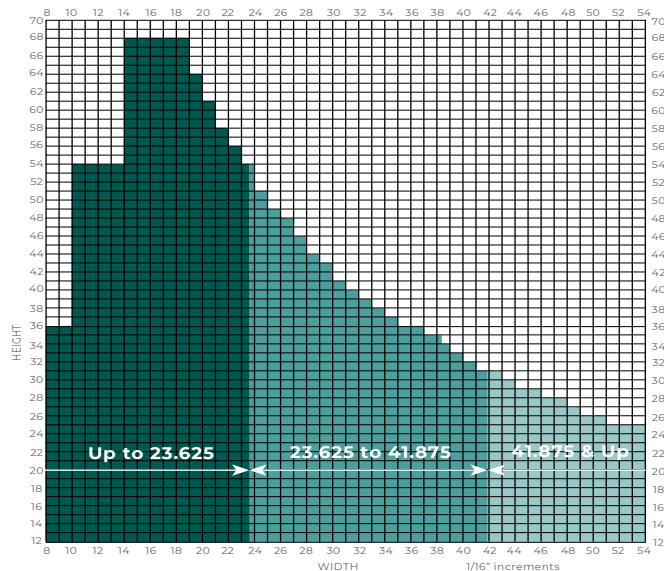



CASEMENT/FIXED



SLIDING



SWING



AWNING



SLIDING PATIO DOORS



7/8" BLINDS + GLASS

FOR WINDOWS AND SLIDING PATIO DOORS

PRODUCT FEATURES:

- Ideal for both doors and windows (casement, fixed, sliding, and awning)
- EasyGlide left- or right-hand operator
- High or low operator position between 30" - 48" high
- Low-E options:
 - Single: 270, 272, 340, 366
 - Dual: 189/270, 189/272, 189/340, 189/366
- Glass tint options:
 - Solar Gray and Solar Bronze
- 10-year full warranty

AVAILABLE COLORS:



OPERATORS:



EasyGlide Operator
0.539" thickness
(Six Color Options)

PROGRAM DETAILS:


- Dimensions:
 - 8" – 48" wide⁺
 - 18" – 80" tall
 - IG Thickness: 7/8" or 1" (with 6mm external glass option)
- Tempered glass - up to 18 ft²*
- Annealed glass - up to 15 ft²*
- Custom size increments 1/16" (height & width)
- Minimum Quantity: 1
- Annealed Shipping Lead Times:
 - US: 8 business days + transit
- Tempered Shipping Lead Times:
 - US: 12 business days + transit

⁺Widths below 10" will have an asymmetrical design

* No more than 36" in one direction

US Patent No. 11,713,618 B2

BLINDS SIZE RANGE[‡]

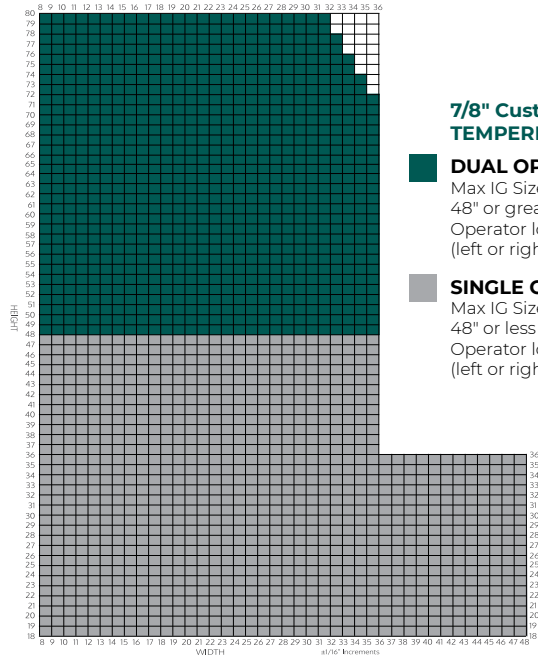


7/8" Custom TEMPERED

DUAL OPERATOR

Max IG Size: 18 sq. ft.
48" or greater in height
Operator location (left or right)

SINGLE OPERATOR

Max IG Size: 12 sq. ft.
48" or less in height
Operator location (left or right)

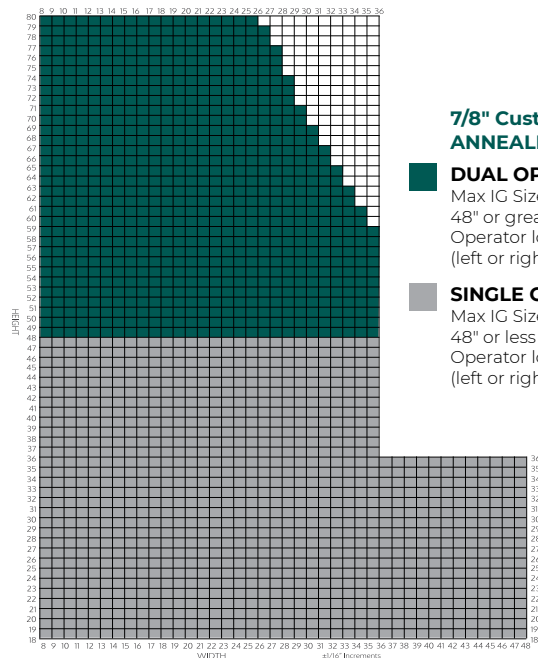

7/8" Custom ANNEALED

DUAL OPERATOR

Max IG Size: 15 sq. ft.
48" or greater in height
Operator location (left or right)

SINGLE OPERATOR

Max IG Size: 12 sq. ft.
48" or less in height
Operator location (left or right)



CASEMENT/FIXED



SLIDING



SWING



AWNING



SLIDING PATIO DOORS



1" BLINDS + GLASS

FOR WINDOWS AND SLIDING PATIO DOORS


PRODUCT FEATURES:

- Ideal for both doors and windows (casement, fixed, sliding, and awning).
- High or low operator position above 30" - 48" high
- EasyGlide left- or right-hand operator
- Low-E options:
 - Single: 270, 272, 340, 366
 - Dual: 189/270, 189/272, 189/340, 189/366
- Glass tint options:
 - Solar Gray and Solar Bronze
- 10-year full warranty


AVAILABLE COLORS:



OPERATORS:




ODL BLINDS SIZE RANGE[‡]

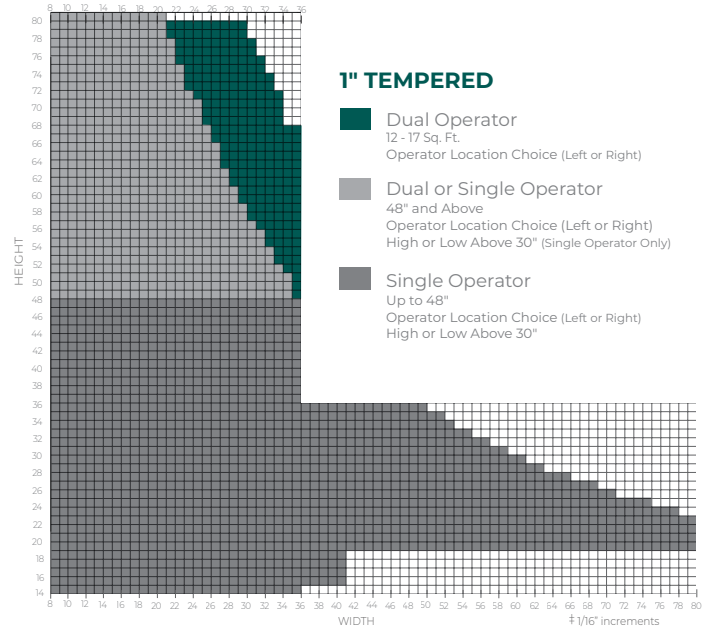

PROGRAM DETAILS:

- Dimensions:
 - 8" – 80" wide⁺
 - 14" – 80" tall
 - IG Thickness: 1" or 1 1/8" (with 6mm external glass option)
- Tempered glass - up to 17 ft²*
- Annealed glass - up to 15 ft²*
- Custom size increments 1/16" (height & width)
- Minimum Quantity: 1
- Annealed Shipping Lead Times:
 - US: 8 business days + transit
- Tempered Shipping Lead Times:
 - US: 12 business days + transit

⁺Widths below 10" will have an asymmetrical design

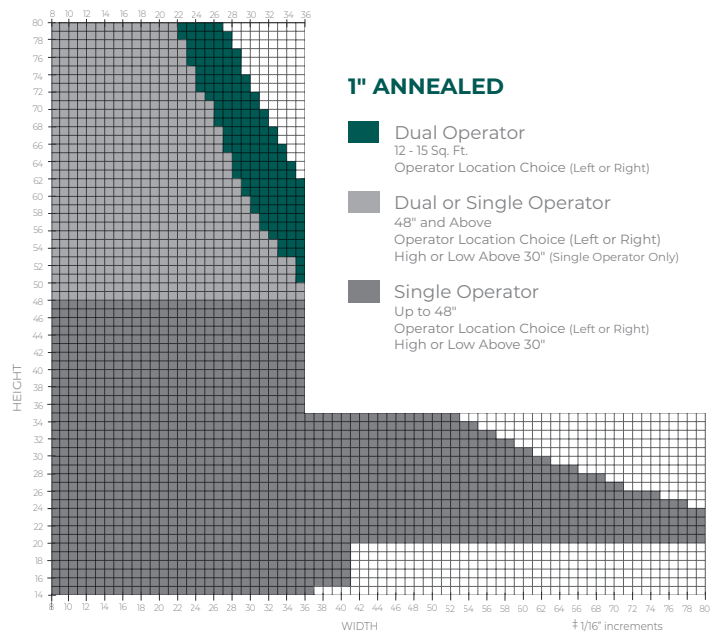

* No more than 36" in one direction



SLIDING PATIO DOORS



1" BLINDS + GLASS CLASSIC

FOR WINDOWS AND SLIDING PATIO DOORS

PRODUCT FEATURES:

- Raise, lower, and tilt blinds
- Classic or Low-Profile dual left- or right-hand operator
- Low-E options:
 - Single: 270, 272, 340, 366
 - Dual: 189/270, 189/272, 189/340, 189/366
- 10-year full warranty

AVAILABLE COLORS:



WHITE

OPERATORS:

CLASSIC




0.667" THICKNESS

LOW-PROFILE



0.438" THICKNESS

"CLASSIC" SIZE RANGE*

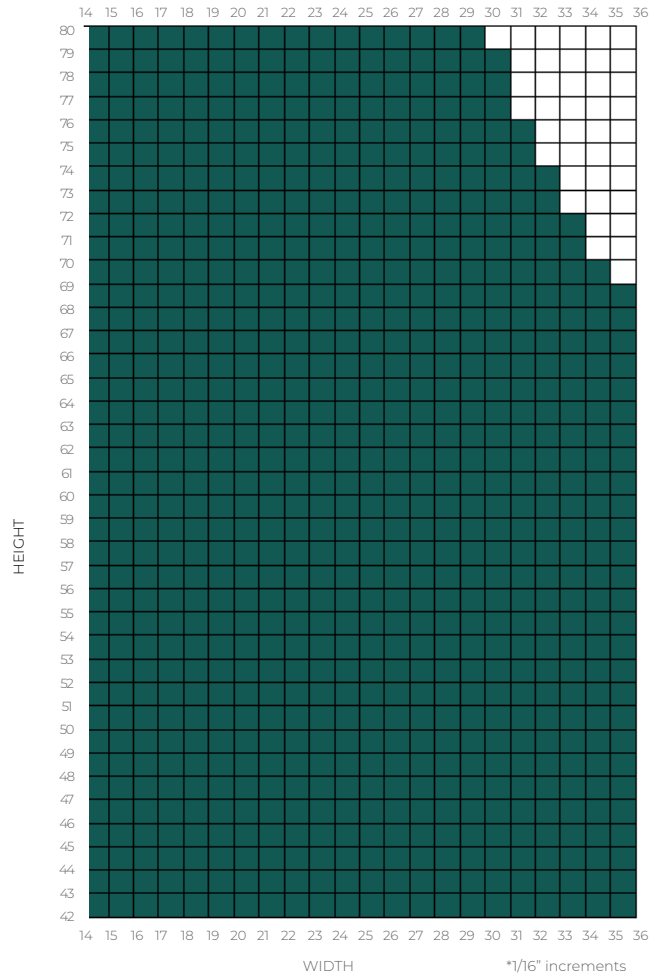

PROGRAM DETAILS:

- Dimensions:
 - 14" – 36" wide
 - 42" – 80" tall
 - 1" thick
- Tempered glass only - up to 17 ft²
- Custom size increments 1/16" (height & width)
- Minimum Quantity: 1
- Tempered Shipping Lead Times:
 - US: 12 business days + transit



CASEMENT/FIXED



SLIDING



SWING



AWNING



SLIDING PATIO DOORS



1" BLINDS + GLASS XL

FOR WINDOWS AND SLIDING PATIO DOORS

PRODUCT FEATURES:

- Ideal for both large format doors and windows (casement, fixed, sliding, and folding)
- EasyGlide left- or right-hand operator
- Low-E options:
 - Single: 270, 272, 340, 366
 - Dual: 189/270, 189/272, 189/340, 189/366
- Glass tint options:
 - Solar Gray or Solar Bronze
- 10-year full warranty

AVAILABLE COLORS:



ESPRESSO



SAND



SILVER MOON



SLATE GRAY



TAN




WHITE

OPERATORS:



EasyGlide Operator
0.539" thickness
(Six Colors)

BLINDS SIZE RANGE#


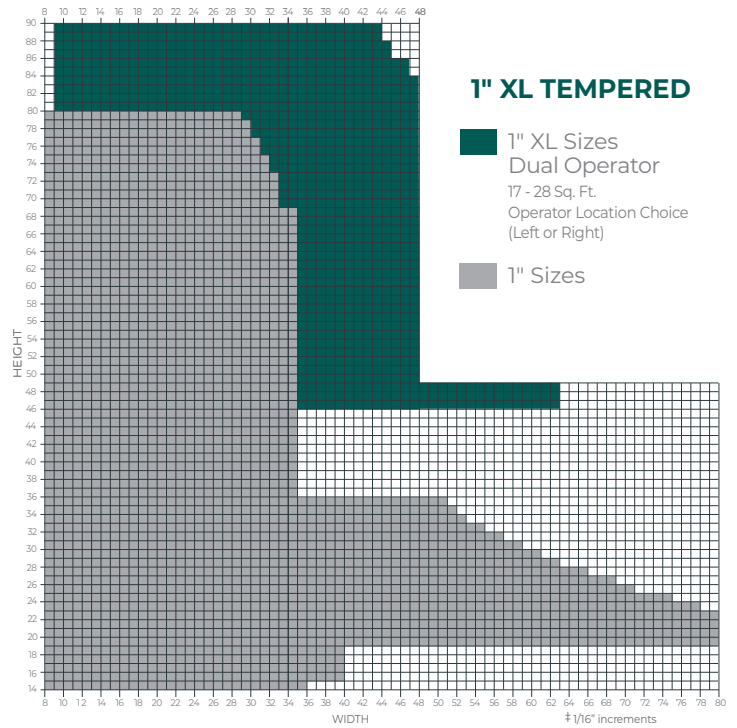


PROGRAM DETAILS:

- Dimensions:
 - 9" – 63" wide
 - 46" – 90" tall
 - 1" thick
- Tempered glass only - up to 28 ft²
- Custom size increments 1/16" (height & width)
- Minimum Quantity: 1
- Tempered Shipping Lead Times:
 - US: 19 business days + transit

* No more than 48" in 1 direction

TECHNICAL DRAWINGS & SPECIFICATIONS

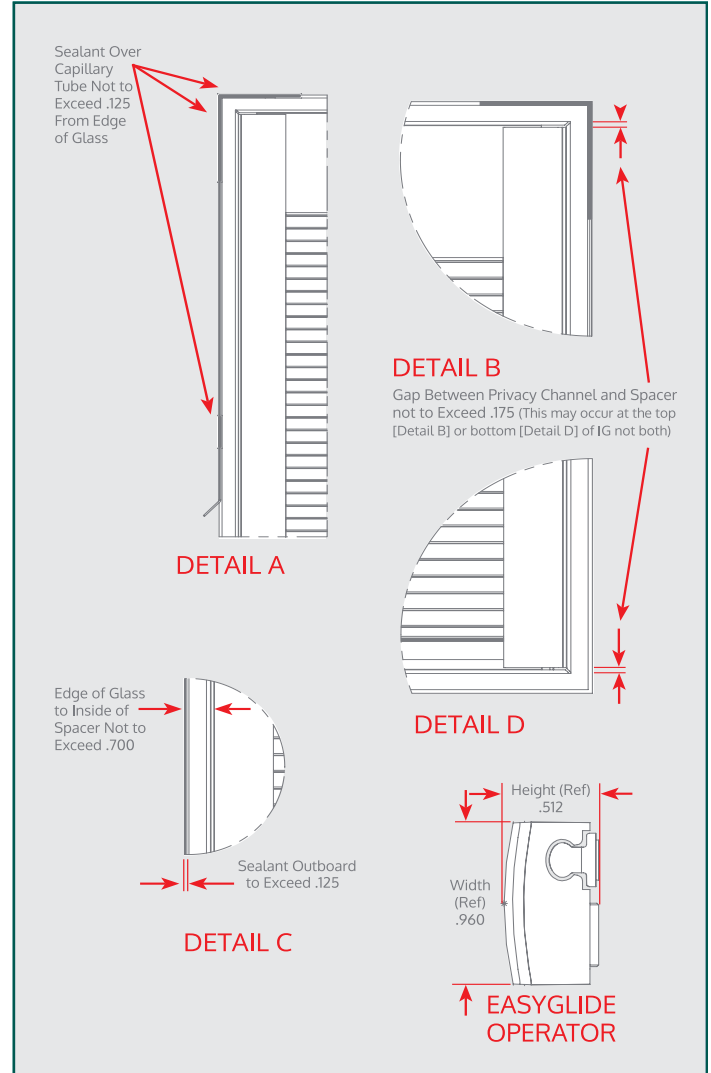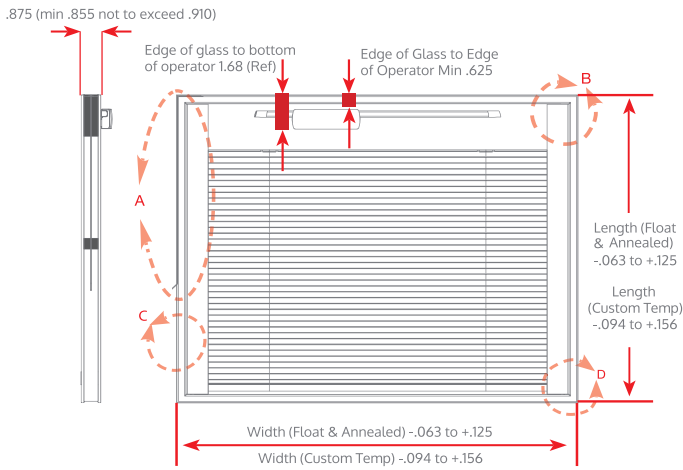


OPERATION	
Blind Function	Raise, Lower, and Tilt
EasyGlide Operator	Clear Overmold/Two Shot
Single Operator	Annealed glass: Up to 9 ft ² or Tempered glass: Up to 9 ft ²
Capillary Tube	Do not block, crush or cut
Operator Position	Top Center (Next to Ladder Cord)

CODE OF COMPLIANCE	
IGCC (seal)	ASTM E2190 seal certification
ANSI (glass)	ANSI Z97.1 safety glazing (Applies to tempered glass only)
ASTM (glass)	ASTM C1036-16 (annealed) & C1048-12 (tempered)
ANSI (safety)	ANSI / WCMA A100.1-2018
ENERGY STAR®	Will help your window achieve ENERGY STAR® performance when select Low-E glass is employed
NFRC	CAD available for simulations


MATERIALS	
Spacer	Intercept®, tin plated steel
Glass (Standard or Low-E)	Annealed or tempered safety glass
Single Low-E	2nd surface soft coat (270, 272, 340, 366)
Dual Low-E	4th surface hard coat Low-E (189)
Glass Tint	Solar Gray or Solar Bronze glass panel 1
Blind Slat	10.5 mm wide aluminum UV stabilized coating
Sealant	Dual seal equivalent
Desiccant	Desiccant matrix (moisture & chemical management)
Decorative Cover Caps	UV stabilized, heat tolerant polymer

TECHNICAL DRAWINGS & SPECIFICATIONS

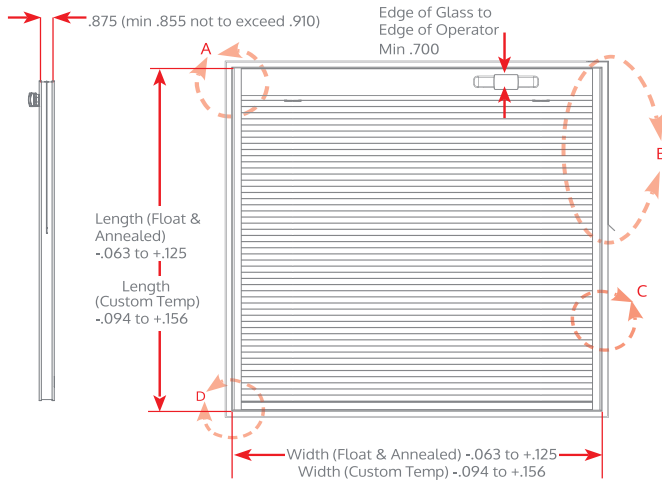


OPERATION	
Blind Function	Tilt
EasyGlide Operator	Clear Overmold/Two Shot
Single Operator	Annealed glass: Up to 9 ft ² or Tempered glass: Up to 9 ft ²
Capillary Tube	Do not block, crush or cut
Operator Position	Top Right

CODE OF COMPLIANCE	
IGCC (seal)	ASTM E2190 seal certification
ANSI (glass)	ANSI Z97.1 safety glazing (Applies to tempered glass only)
ASTM (glass)	ASTM C1036-16 (annealed) & C1048-12 (tempered)
ANSI (safety)	ANSI / WCMA A100.1-2018
ENERGY STAR®	Will help your window achieve ENERGY STAR® performance when select Low-E glass is employed
NFRC	CAD available for simulations

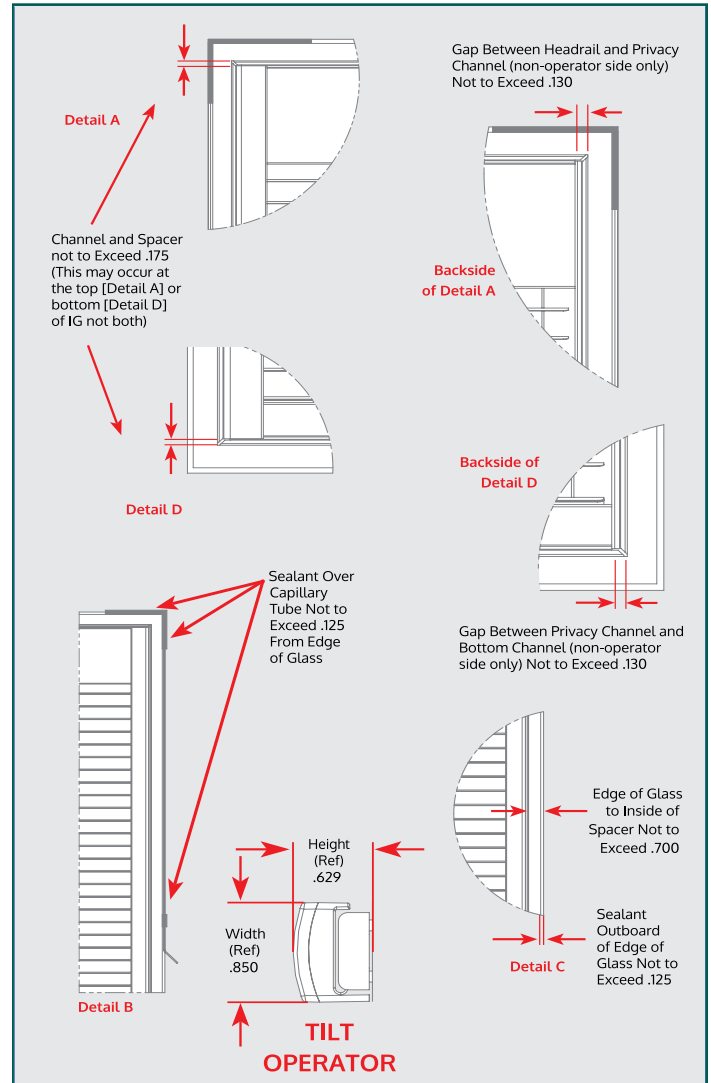

MATERIALS	
Spacer	Intercept®, tin plated steel
Glass (Standard or Low-E)	Annealed or tempered safety glass
Single Low-E	2nd surface soft coat (270, 272, 340, 366)
Dual Low-E	4th surface hard coat Low-E (189)
Glass Tint	Solar Gray or Solar Bronze glass panel 1
Blind Slat	11.5 mm wide aluminum UV stabilized coating
Sealant	Dual seal equivalent
Desiccant	Desiccant matrix (moisture & chemical management)
Decorative Cover Caps	UV stabilized, heat tolerant polymer

TECHNICAL DRAWINGS & SPECIFICATIONS

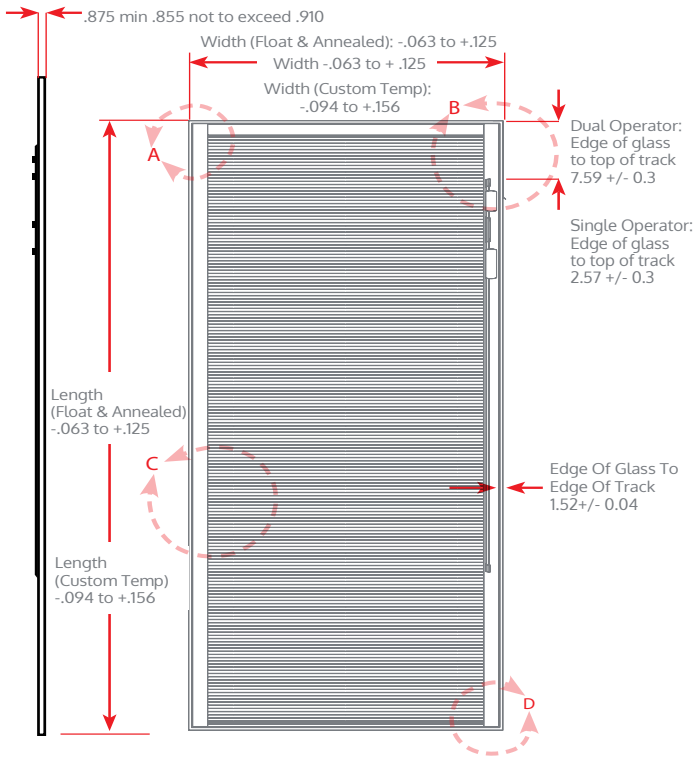


OPERATION

Blind Function	Raise, Lower, and Tilt
EasyGlide Operator	Clear Overmold/Two Shot
Single Operator	48" or less in height
Dual Operator	48" or greater in height
Capillary Tube	Do not block, crush or cut
Operator Hand	Left or right
Operator Position	High or low (single operator only above 30" in height)

CODE OF COMPLIANCE



IGCC (seal)	ASTM E2190 seal certification
ANSI (glass)	ANSI Z97.1 safety glazing (Applies to tempered glass only)
ASTM (glass)	ASTM C1036-16 (annealed) & C1048-12 (tempered)
ANSI (safety)	ANSI / WCMA A100.1-2018
ENERGY STAR®	Will help your window achieve ENERGY STAR® performance when select Low-E glass is employed
NFRC	CAD available for simulations

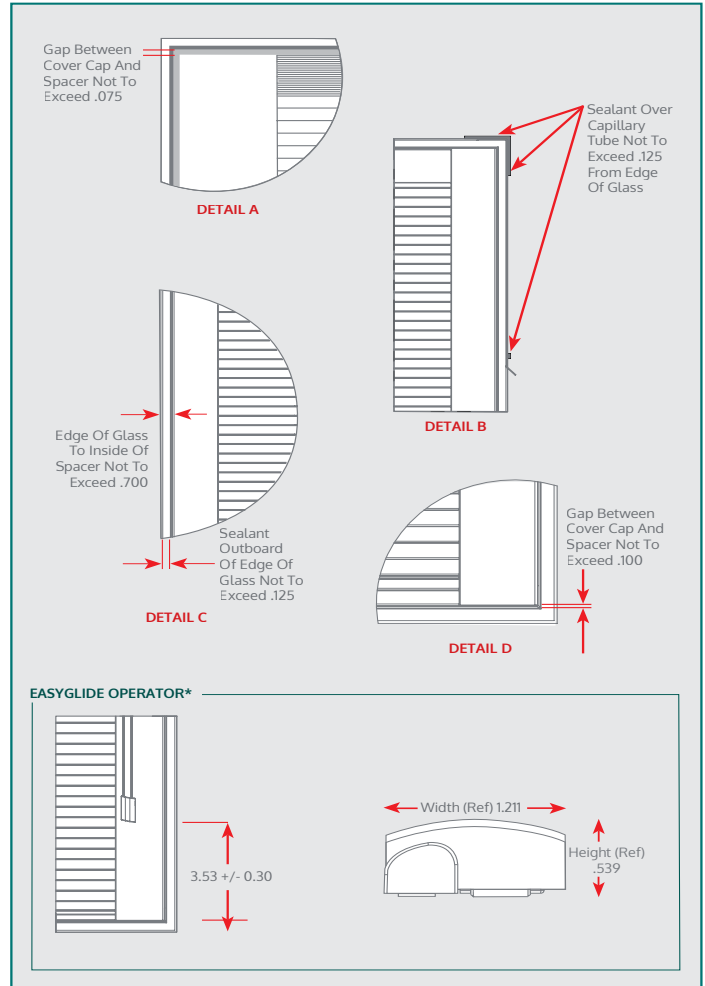

MATERIALS

Spacer	Intercept®, tin plated steel
Glass (Standard or Low-E)	Annealed or tempered safety glass
Single Low-E	2nd surface soft coat (270, 272, 340, 366)
Dual Low-E	4th surface hard coat Low-E (189)
Glass Tint	Solar Gray or Solar Bronze glass panel 1
Blind Slat	10 mm wide aluminum UV stabilized coating
Sealant	Dual seal equivalent
Desiccant	Desiccant matrix (moisture & chemical management)
Decorative Cover Caps	UV stabilized, heat tolerant polymer

TECHNICAL DRAWINGS & SPECIFICATIONS

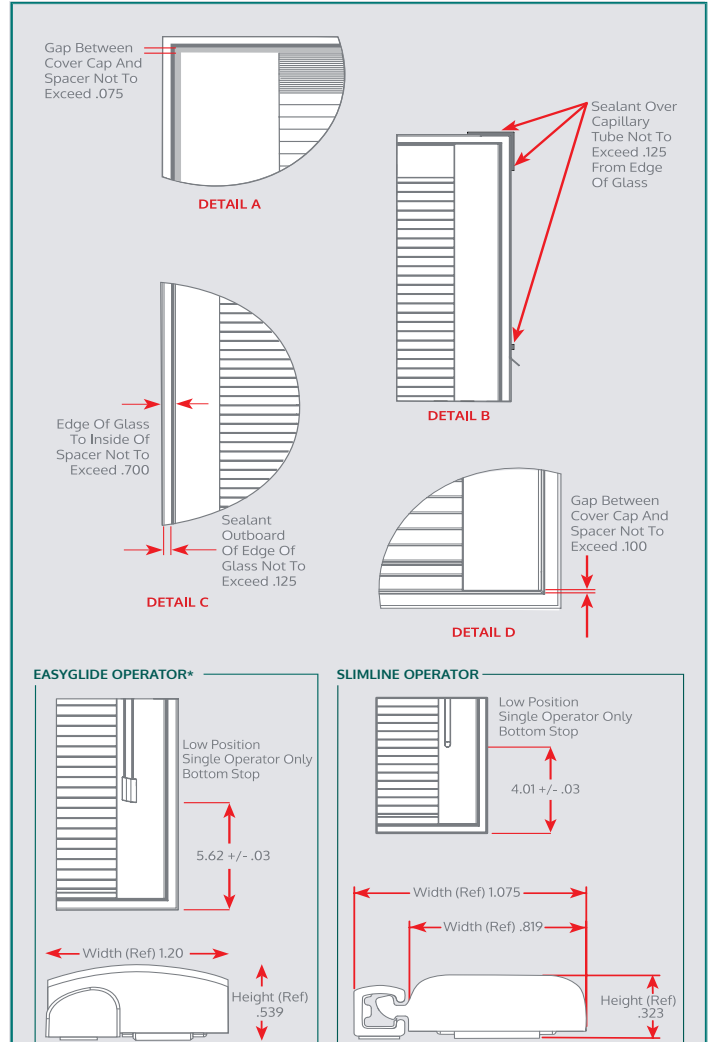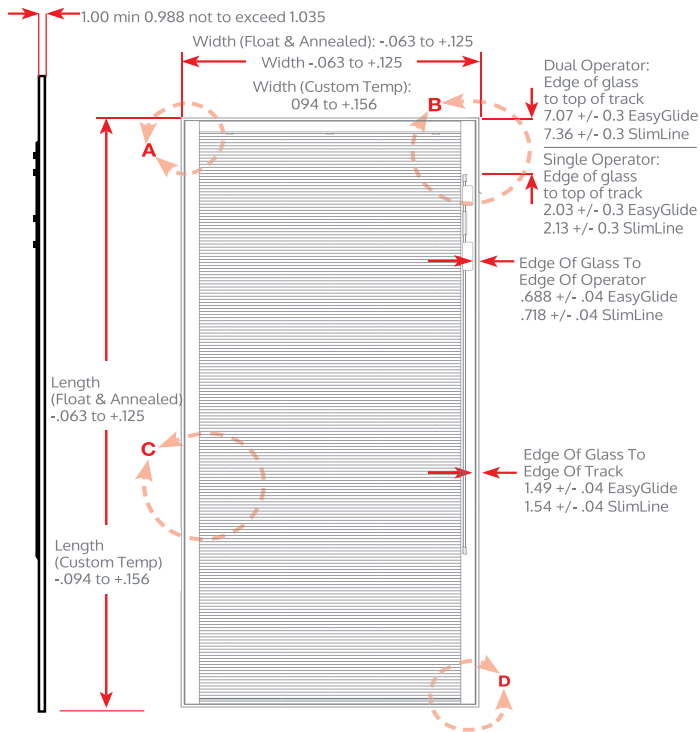

OPERATION

Blind Function	Raise, Lower, and Tilt
EasyGlide Operator	Clear Overmold/Two Shot
SlimLine Operator	Single Shot
Dual Operator	Annealed glass: 12 to 15 ft ² Tempered glass: 12 to 17 ft ²
Dual or Single Operator	See size chart for details
Single Operator	Annealed glass: Up to 12 ft ² Tempered glass: Up to 12 ft ²
Capillary Tube	Do not block, crush or cut
Operator Hand	Left or right
Operator Position	High or low (single operator only above 30" in height)



CODE OF COMPLIANCE

IGCC (seal)	ASTM E2190 seal certification
ANSI (glass)	ANSI Z97.1 safety glazing (Applies to tempered glass only)
ASTM (glass)	ASTM C1036-16 (annealed) & C1048-12 (tempered)
ANSI (safety)	ANSI / WCMA A100.1-2018
ENERGY STAR®	Will help your window achieve ENERGY STAR® performance when select Low-E glass is employed
NFRC	CAD available for simulations

MATERIALS

Spacer	Intercept®, tin plated steel
Glass (Standard or Low-E)	Annealed or tempered safety glass
Single Low-E	2nd surface soft coat (270, 272, 340, 366)
Dual Low-E	4th surface hard coat Low-E (189)
Glass Tint	Solar Gray or Solar Bronze glass panel 1
Blind Slat	12.5 mm wide aluminum UV stabilized coating
Sealant	Dual seal equivalent
Desiccant	Desiccant matrix (moisture & chemical management)
Decorative Cover Caps	UV stabilized, heat tolerant polymer

TECHNICAL DRAWINGS & SPECIFICATIONS

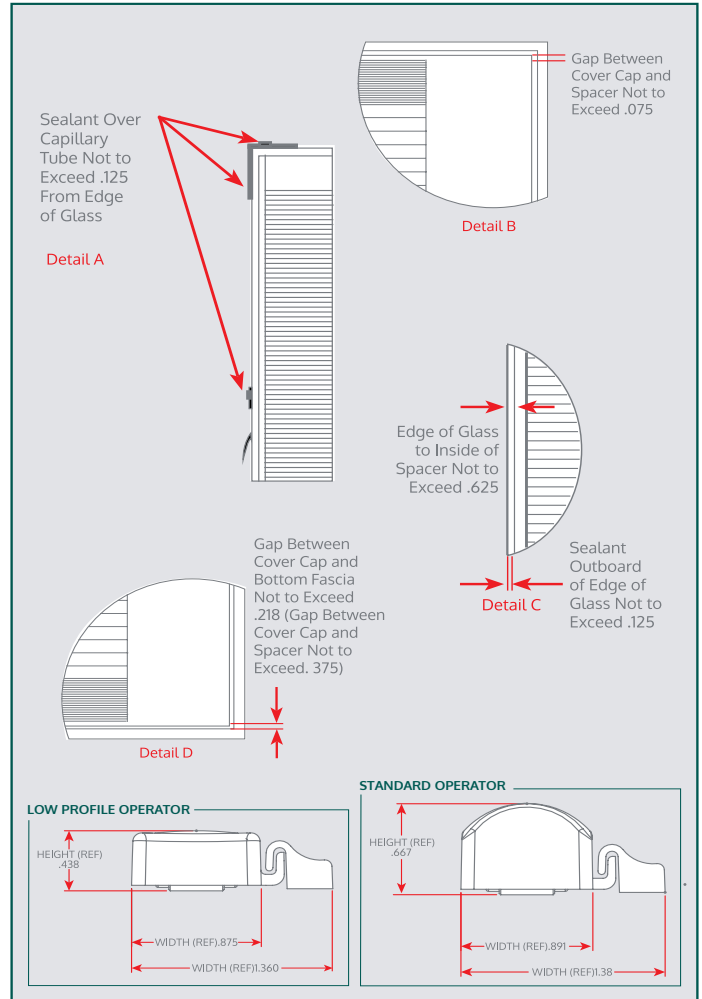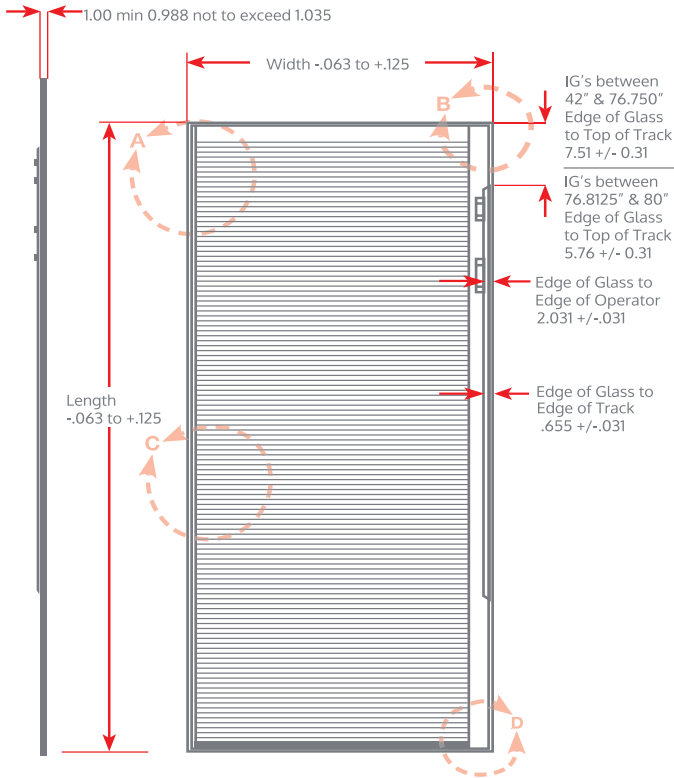

OPERATION

Blind Function	Raise, Lower, and Tilt
Dual Operator	Tempered up to 17 ft ²
Operator Sizes	Classic Design: 0.667" Thickness Low Profile Design: 0.438 Thickness
Capillary Tube	Do not block, crush or cut
Operator Hand	Right/Left



CODE OF COMPLIANCE

IGCC (seal)	ASTM E2190 seal certification
ANSI (glass)	ANSI Z97.1 safety glazing (Applies to tempered glass only)
ASTM (glass)	ASTM 0048-12 (tempered)
ANSI (safety)	ANSI / WCMA A100.1-2018
ENERGY STAR®	Will help your window achieve ENERGY STAR® performance when select Low-E glass is employed
NFRC	Reference Certified Product Directory for sliding door examples (CAD available for simulations)

MATERIALS

Spacer	Intercept®, tin plated steel
Glass (Standard or Low-E)	Annealed or tempered safety glass
Single Low-E	2nd surface soft coat (270, 272, 340, 366)
Dual Low-E	4th surface hard coat Low-E (189)
Blind Slat	12.5mm wide aluminum UV stabilized coating
Sealant	Dual seal equivalent
Desiccant	Desiccant matrix (moisture & chemical management)
Decorative Cover Caps	UV stabilized, heat tolerant polymer

TECHNICAL DRAWINGS & SPECIFICATIONS

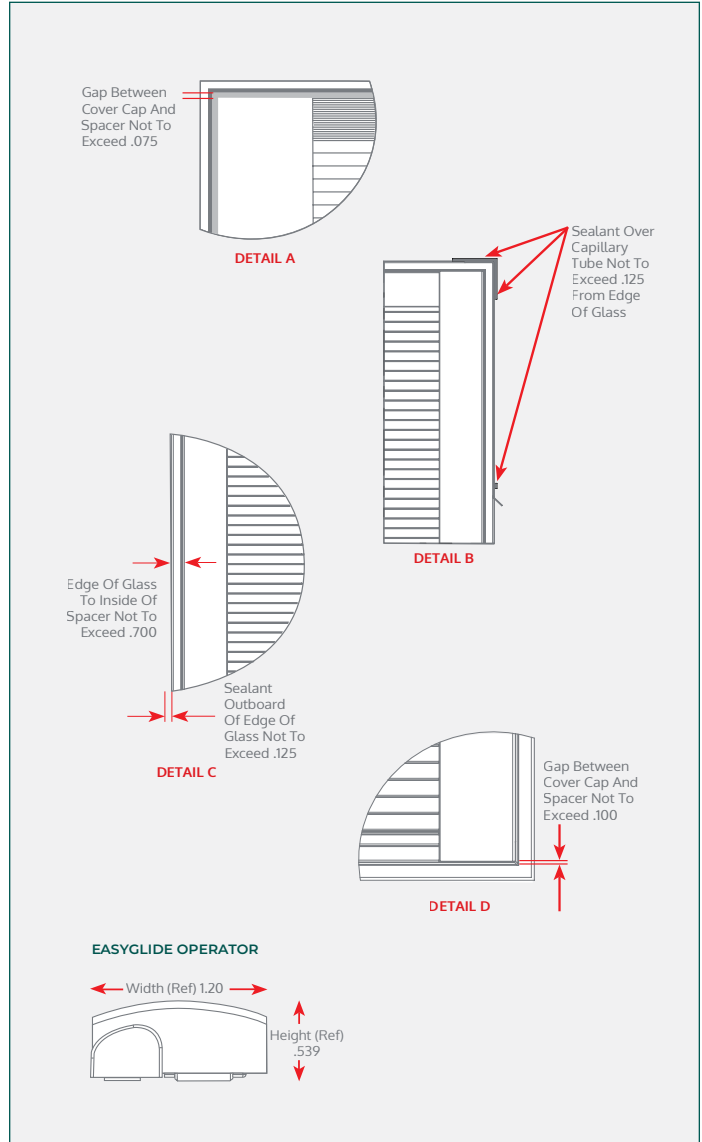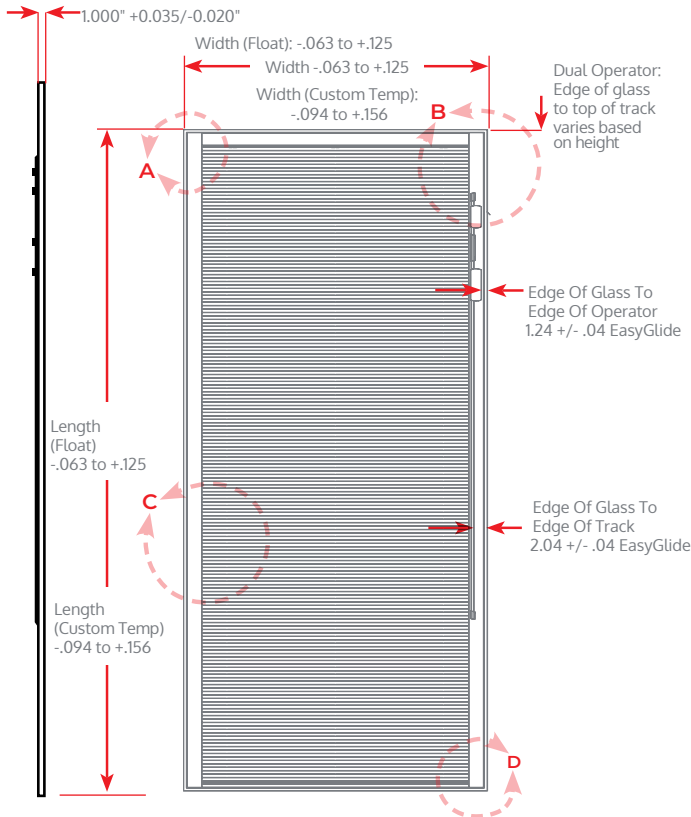

OPERATION

Blind Function	Raise, Lower, and Tilt
EasyGlide Operator	Clear Overmold/Two Shot
Dual Operator	Tempered glass: Up to 28 ft ²
Dual Operator	See size chart for details
Capillary Tube	Do not block, crush or cut
Operator Hand	Left or right

CODE OF COMPLIANCE

IGCC (seal)	ASTM E2190 seal certification
ANSI (glass)	ANSI Z97.1 safety glazing (Applies to tempered glass only)
ASTM (glass)	C1048-12 (tempered)
ANSI (safety)	ANSI / WCMA A100.1-2018
ENERGY STAR®	Will help your window achieve ENERGY STAR® performance when select Low-E glass is employed
NFRC	CAD available for simulations

MATERIALS

Spacer	Intercept®, tin plated steel
Glass (Standard or Low-E)	4mm tempered safety glass
Single Low-E	2nd surface soft coat (270, 272, 340, 366)
Dual Low-E	4th surface hard coat Low-E (189)
Blind Slat	10mm wide aluminum UV stabilized coating
Sealant	Dual seal equivalent
Desiccant	Desiccant matrix (moisture & chemical management)
Decorative Cover Caps	UV stabilized, heat tolerant polymer





FEATURES that go beyond

WHY **BLINDS + GLASS?**

- Allows consumers to further **CUSTOMIZE** their windows and doors with well-designed light and privacy solutions
- **INCREASES MARGINS** with higher pricing options
- Establishes you as a **MARKET LEADER** while expanding your product portfolio
- Built for long-term performance with **10-YEAR WARRANTY**
- Coordinates with **PATIO AND ENTRY DOOR** products to create a more cohesive look in the home
- A **POPULAR** choice for open dining, kitchen, baths, large format windows, and family areas of the home
- Offers consumers **LESS MAINTENANCE** and **SAFER OPTIONS** for homes with children and pets
- **SIX COLOR OPTIONS** that coordinate with interiors and exteriors of the home



IG PANEL PROGRAM DETAILS

	7/8" RLT-TOP	7/8" TILT	7/8"	1"	1" CLASSIC	1" XL
IG WIDTH RANGES IG HEIGHT RANGES IG THICKNESS	15"-54" wide 12"-41" tall 7/8" thick or 1" (with 6mm external glass option)	8"-54" wide 12"-68" tall 7/8" thick or 1" (with 6mm external glass option)	8"-48" wide 18"-80" tall 7/8" thick or 1" (with 6mm external glass option)	8"-80" wide 14"-80" tall 1" thick or 1 1/8" (with 6mm external glass option)	14"-36" wide 42"-80" tall 1" thick	9"-63" wide 46"-90" tall 1" thick
MAXIMUM SQ FT	9	9	18	17	17	28
GLASS TYPE	Tempered or Annealed glass (single operator)	Tempered or Annealed glass (single operator)	Tempered glass up to 18 ft ² (dual operator 48" or greater) Annealed glass up to 15 ft ² (dual operator 48" or less)	Tempered glass up to 17 ft ² (single or dual operator 48" or greater) Annealed glass up to 15 ft ² (single or dual operator 48" or less)	Tempered glass only (dual operator)	Tempered glass only (dual operator)
LOW-E OPTIONS	Single: 270, 272, 340, 366 Dual: 189/270, 189/272, 189/340, 189/366	Single: 270, 272, 340, 366 Dual: 189/270, 189/272, 189/340, 189/366	Single: 270, 272, 340, 366 Dual: 189/270, 189/272, 189/340, 189/366	Single: 270, 272, 340, 366 Dual: 189/270, 189/272, 189/340, 189/366	Single: 270, 272, 340, 366 Dual: 189/270, 189/272, 189/340, 189/366	Single: 270, 272, 340, 366 Dual: 189/270, 189/340, 189/366, 189/272
GLASS TINT	Solar Gray or Solar Bronze	Solar Gray or Solar Bronze	Solar Gray or Solar Bronze	Solar Gray or Solar Bronze	N/A	N/A
OPERATOR OPTIONS	Top center operator position IG only EasyGlide design 0.512" thickness	Upper right corner operator position IG only Tilt design 0.629" thickness	High or low operator position Left or right-hand operator EasyGlide design 0.539" thickness	High or low operator position Left or right-hand operator EasyGlide design 0.539" thickness SlimLine design* 0.323" thickness	Classic design 0.667" thickness Left or right-hand operator Low profile design 0.438" thickness	Left or right-hand operator EasyGlide design 0.539" thickness
BLIND COLOR	Espresso, Sand, Silver Moon, Slate Gray, Tan, White	Espresso, Sand, Silver Moon, Slate Gray, Tan, White	Espresso, Sand, Silver Moon, Slate Gray, Tan, White	Espresso, Sand, Silver Moon, Slate Gray, Tan, White	White	Espresso, Sand, Silver Moon, Slate Gray, Tan, White
MINIMUM QUANTITY	Low-E: 1 CL/CL: 1	Low-E: 1 CL/CL: 1	Low-E: 1 CL/CL: 1	Low-E: 1 CL/CL: 1	Low-E: 1 CL/CL: 1	Low-E: 1 CL/CL: 1
WORKING DAYS TO DELIVER	Annealed: 8 business days + transit Tempered: 12 business days + transit	Annealed: 8 business days + transit Tempered: 12 business days + transit	Annealed: 8 business days + transit Tempered: 12 business days + transit	Annealed: 8 business days + transit Tempered: 12 business days + transit	Tempered: 12 business days + transit	Tempered: 19 business days + transit
10 YEAR FULL WARRANTY	✓	✓	✓	✓	✓	✓

- * SlimLine Operator available in white
- + Widths below 10" will have an asymmetrical design
- See size chart for limitations



WARNING!
Cancer and Reproductive Harm -
www.P65Warnings.ca.gov